

# Pallet Specifications

# Pallet Manufacturing LLP



Prepared By: Amol Pawar

Company: Pallet Manufacturing LLP


Analysis ID:

Address:

Date:

**Pallet Information:** 1219 mm L x 1016 mm W, Weight - 32.4 kg Heat Treated, Reusable

**Pallet Description:** 4way, DoubleFace, Non-reversible, Block pallet

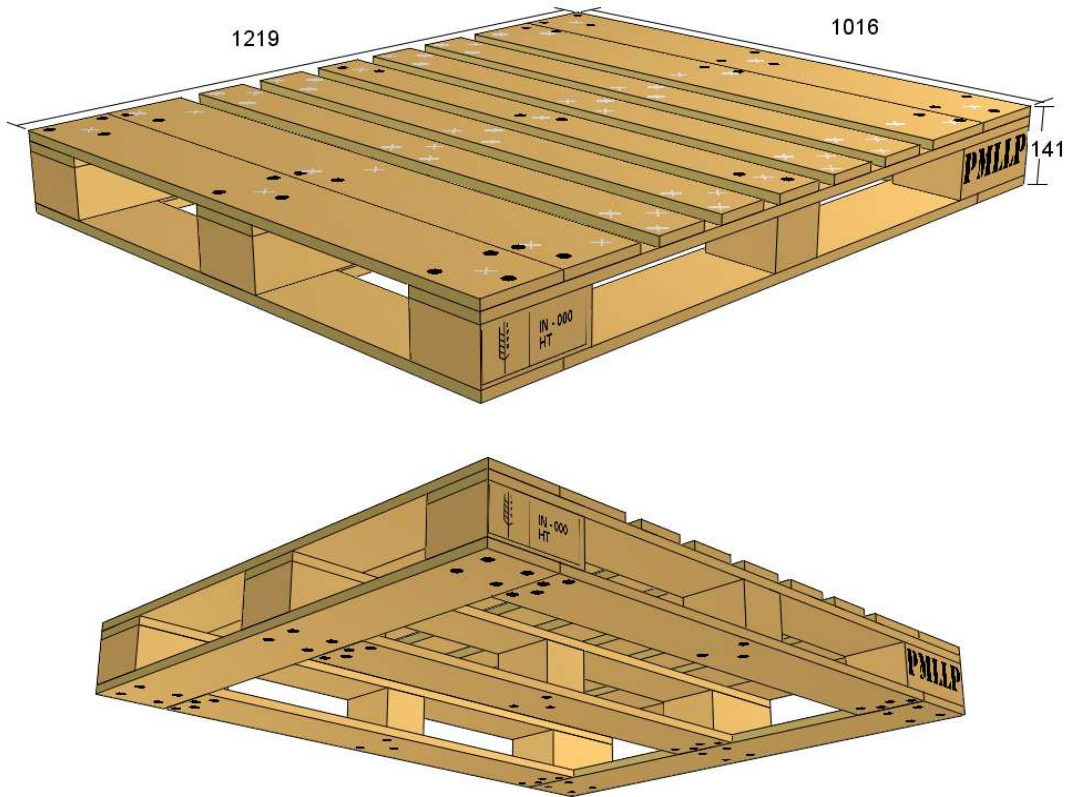

## Components

Top Deck Boards (mm)				Perimeter Base Boards (mm)			
Quantity	Thickness	Width	Length	Quantity	Thickness	Width	Length
4	17	140	1016	2	17	140	1016
5	17	89	1016	3	17	140	940
Top Stringer Boards (mm)				<b>All Parts</b> 0.0534 cu m using one species class 100% Southern Yellow Pine (SYP) Standard & Better grade Kiln Dried(KD19)19%			
Quantity	Thickness	Width	Length				
3	17	127	1219				
Pallet Blocks (mm)							
Quantity	Height	Width	Length				
6	89	127	191				
3	89	127	95				
<b>Nail count:93</b>		<b>Mat fastener count:57</b>		ISPM 15 Compliant – Heat Treated (HT)			

**Notes:**

1. _____	3. _____
2. _____	4. _____

# Customer/Vendor Pallet Specifications      Pallet Manufacturing LLP

(dimensions in millimeters)




Prepared By: Amol Pawar

Company: Pallet Manufacturing LLP

Analysis ID:

Address:

Date:

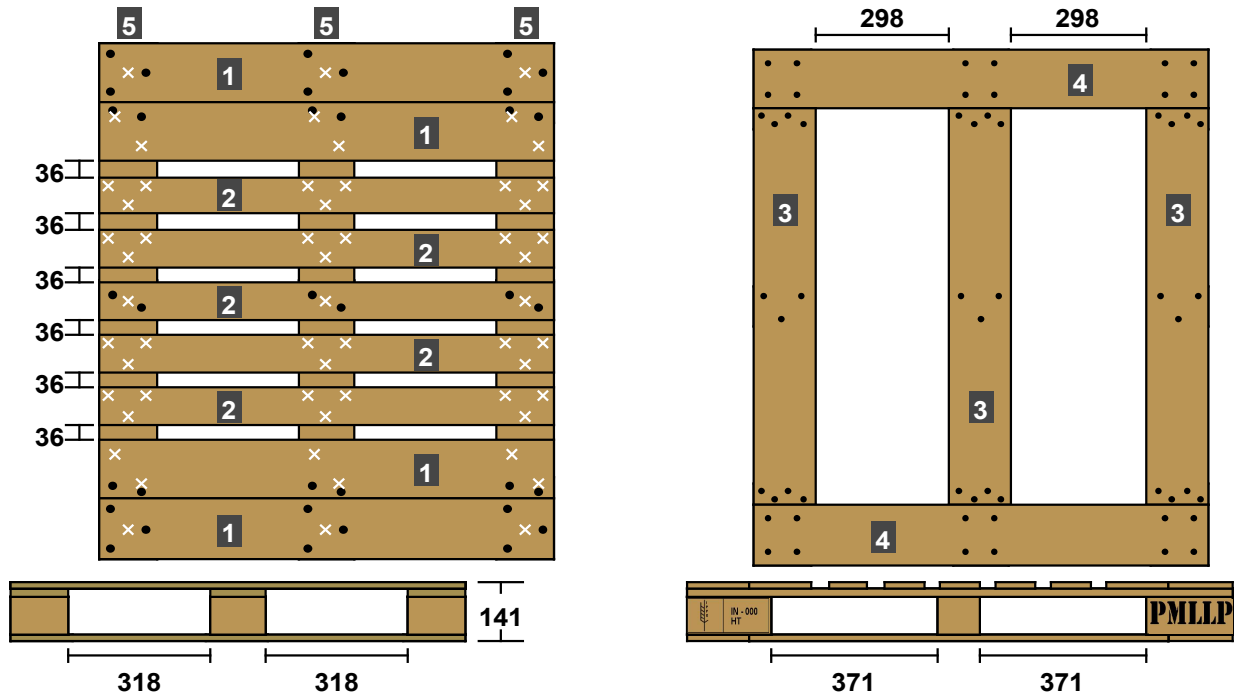

Deck Boards			Stringers Boards			Blocks		
Item	Qty.	Dimensions	Item	Qty.	Dimensions	< W >	Qty.	Dimensions
1	4	17T x 140W x 1016L	5	3	17T x 127W x 1219L		6	89H x 127W x 191L
2	5	17T x 89W x 1016L					3	89H x 127W x 95L
3	3	17T x 140W x 940L						
4	2	17T x 1016W x 140L						

**Style:** Reusable, 4way, DoubleFace  
Non-reversible, Perimeter Base

**Lumber:** **Acceptable Lumber Species:**  
100% Southern Yellow Pine

**Min Part Grade:** Standard & Better

**Max Moisture Content:** 19%

**Fastener Counts:** 93(Block) 57(Mat)

**Length:** \_\_\_\_\_

**Gauge:** \_\_\_\_\_

**Type:** \_\_\_\_\_

**Point:** \_\_\_\_\_

**Dimensional Tolerance:**  
Out of Square deviation 6 mm  
(12 mm Difference in diagonals).  
Overall Length & Width deviation + or - 5 mm.  
Overall pallet height deviation + or - 3 mm.  
Pallets shall lie flat at all points within 12 mm.

**Notes:** (lengths in millimeters)  
ISPM 15 Compliant - Heat Treated (HT)

1. \_\_\_\_\_
2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_

**Approved**

**Version No.**

**ID.**

**Drawing No.**