

Pallet Specifications

Pallet Manufacturing LLP



Prepared By: Amol Pawar


Company: Pallet Manufacturing LLP

Analysis ID: 1370x1370mm

Address:

Date: 19.04.2024

Pallet Information: 1370 mm L x 1370 mm W, Weight - 78.6 kg Heat Treated, Reusable, New
Pallet Description: Skid, 2way, SingleFace, Non-reversible, Flush

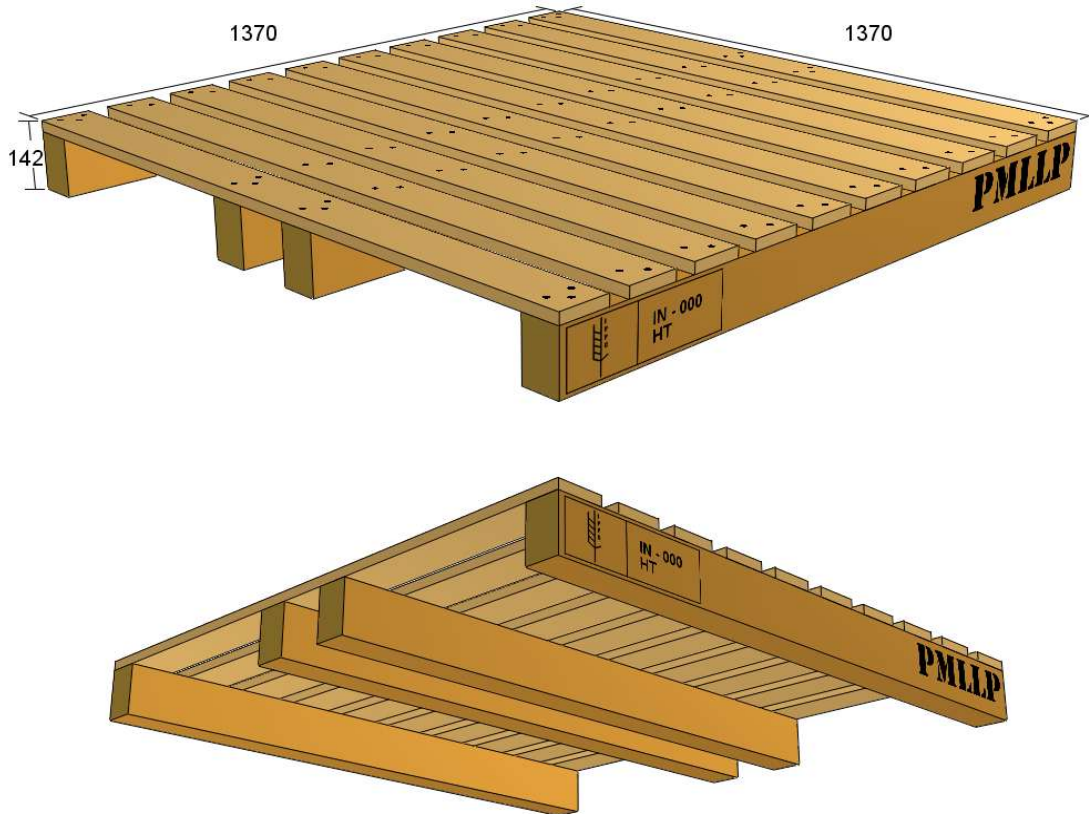

Components

Top Deck Boards (mm) Quantity Thickness Width Length 10 22 100 1370				Lumber 0.0795 cu m using one species class 100% High Density Hardwoods (HDH) Premium & Better grade Green50%
Stringers (mm) Notch: 2way Quantity Height Width Length 4 120 75 1370				
Fastener Counts:88				ISPM 15 Compliant – Heat Treated (HT)
Notes:				
1. _____		3. _____		
2. _____		4. _____		

Customer/Vendor Pallet Specifications Pallet Manufacturing LLP

(dimensions in millimeters)




Prepared By: Amol Pawar

Company: Pallet Manufacturing LLP

Analysis ID: 1370x1370mm

Address:

Date: 19.04.2024

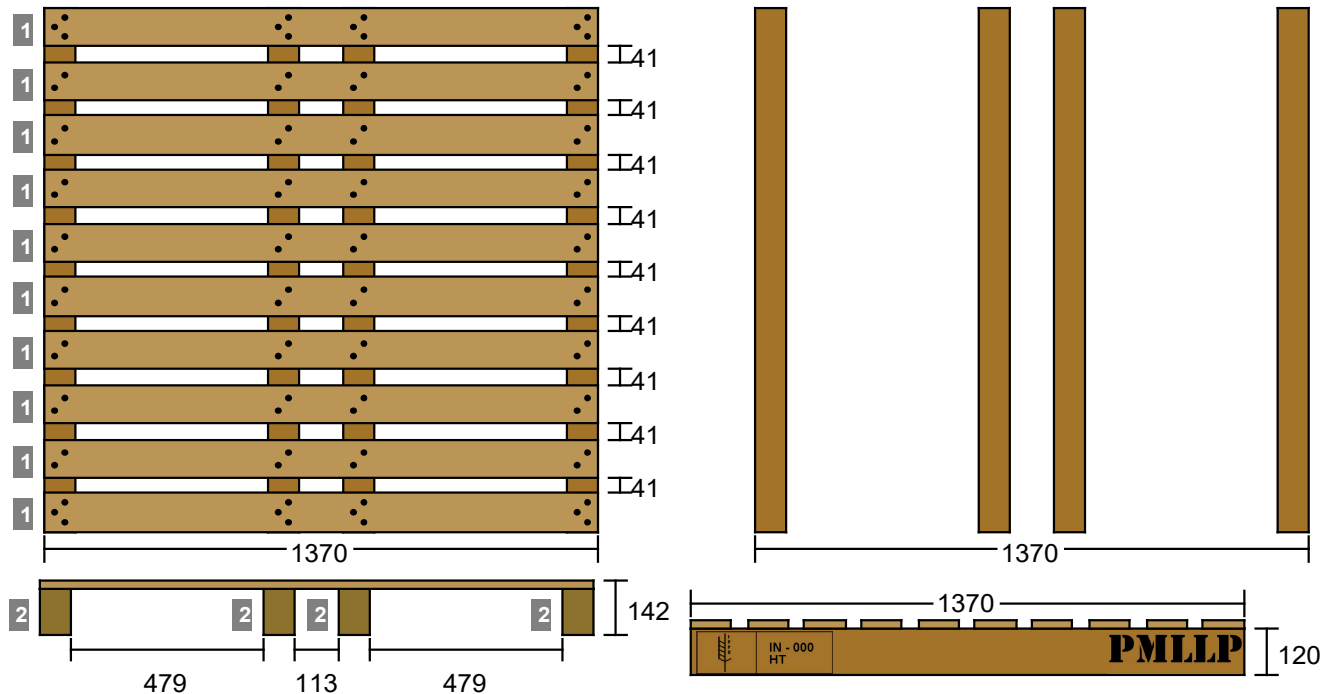

Top Deck Boards			Bottom Deck Boards			Stringers		
Item	Qty.	Dimensions	Item	Qty.	Dimensions	Item	Qty.	Dimensions
1	10	22T x 100W x 1370L				2	4	120H x 75W x 1370L

<p>Style: Reusable, 2way, SingleFace Non-reversible</p> <p>Lumber: Acceptable Lumber Species: 100% High Density Hardwoods</p> <p>Min Part Grade: Premium & Better</p> <p>Max Moisture Content: 50%</p> <p>Fastener Counts: 88</p> <p>Length: _____</p> <p>Gauge: _____</p> <p>Type: _____</p> <p>Point: _____</p> <p>Dimensional Tolerance: Out of Square deviation 6 mm (12 mm Difference in diagonals). Overall Length & Width deviation + or - 5 mm. Overall pallet height deviation + or - 3 mm. Pallets shall lie flat at all points within 12 mm.</p>	<p>Notes: (lengths in millimeters) ISPM 15 Compliant – Heat Treated (HT)</p> <p>1. _____</p> <p>2. _____</p> <p>3. _____</p> <p>4. _____</p> <p>Approved</p> <p>Version No.</p> <p>ID.</p> <p>Drawing No.</p>
--	--